


Modello	Portata Kg	S m	H mm	h mm	D1 mm	B mm	X2 mm	X1 mm	C mm	Trave IPE
S-125/2	125	2	3.000	2.855	200	347	430	230	400	120
S-125/3	125	3	3.000	2.835	200	347	430	230	400	140
S-125/4	125	4	3.000	2.795	200	347	465	230	400	180
S-125/5	125	5	3.000	2.770	215	527	575	230	400	200
S-125/6	125	6	3.000	2.750	215	527	695	230	400	220
S-125/7	125	7	3.000	2.750	290	677	745	230	550	240
S-125/8	125	8	3.000	2.720	290	677	745	230	550	240
T-250/2	250	2	3.000	2.830	215	527	415	235	400	140
T-250/3	250	3	3.000	2.810	215	527	415	235	400	160
T-250/4	250	4	3.000	2.770	215	527	525	235	400	200
T-250/5	250	5	3.000	2.750	290	677	675	235	550	220
T-250/6	250	6	3.000	2.700	290	677	645	235	550	270
T-250/7	250	7	3.000	2.670	290	677	705	235	550	300
T-250/8	250	8	3.000	2.640	345	907	955	235	700	330
U-500/2	500	2	3.000	2.810	290	677	445	255	550	160
U-500/3	500	3	3.000	2.770	290	677	525	255	550	200
U-500/4	500	4	3.000	2.730	290	677	525	255	550	240
U-500/5	500	5	3.000	2.700	290	677	605	255	550	270
U-500/6	500	6	3.000	2.640	345	907	655	255	700	330
U-500/7	500	7	3.000	2.610	370	907	760	255	700	360
U-500/8	500	8	3.000	2.610	370	907	1565	255	700	360
V-1000/2	1000	2	3.000	2.790	290	677	535	255	550	180
V-1000/3	1000	3	3.000	2.750	290	677	535	255	550	220
V-1000/4	1000	4	3.000	2.700	345	907	735	255	700	270
V-1000/5	1000	5	3.000	2.640	370	907	705	255	700	330
V-1000/6	1000	6	3.000	2.610	440	907	955	255	800	360
V-1000/7	1000	7	3.000	2.610	440	907	1765	255	800	360
V-1000/8	1000	8	3.000	2.520	440	907	1765	255	800	450
VA-2000/3	2000	3	3.000	2.720	370	907	735	265	700	270
VA-2000/4	2000	4	3.000	2.660	440	907	835	265	800	33
VA-2000/5	2.000	5	3.000	2.590	440	907	935	265	800	400

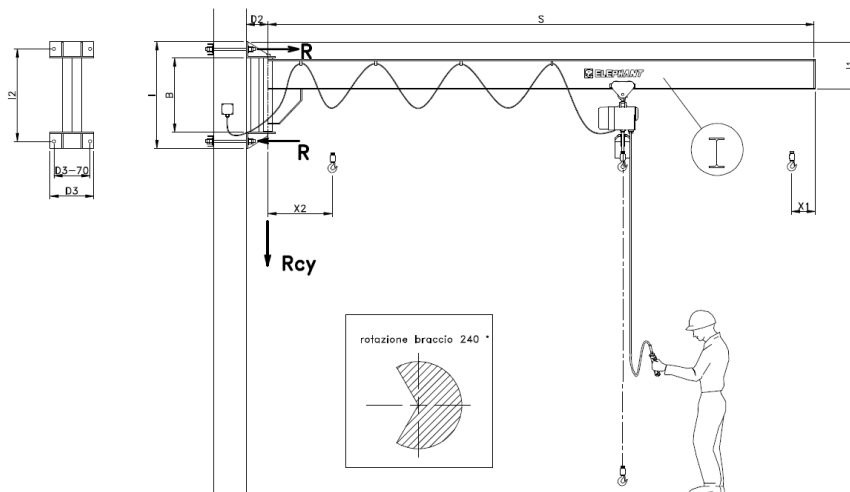

Modello	Portata Kg	S m	B mm	X2 mm	X1 mm	I mm	D2 mm	I1 mm	D3 mm	I2 mm	I3 mm	Trave IPE
Z-125/2	125	2	347	430	230	647	205	290	400	507	150	120
Z-125/3	125	3	347	430	230	647	205	310	400	507	170	140
Z-125/4	125	4	347	465	230	647	205	350	400	507	210	180
Z-125/5	125	5	527	575	230	827	200	370	400	692	230	200
Z-125/6	125	6	527	695	230	827	200	390	400	692	250	220
Z-125/7	125	7	677	745	230	977	200	410	400	842	270	240
Z-125/8	125	8	677	745	230	977	200	410	400	842	270	240
W-250/2	250	2	527	415	235	827	200	310	400	692	170	140
W-250/3	250	3	527	415	235	827	200	330	400	692	190	160
W-250/4	250	4	527	525	235	827	200	370	400	692	230	200
W-250/5	250	5	677	675	235	977	200	390	400	842	250	220
W-250/6	250	6	677	645	235	977	200	440	400	842	300	270
W-250/7	250	7	677	705	235	977	195	470	400	842	330	300
W-250/8	250	8	907	955	235	1207	170	500	450	1075	360	330
X-500/2	500	2	677	445	255	977	200	330	400	842	190	160
X-500/3	500	3	677	525	255	977	200	370	400	842	230	200
X-500/4	500	4	677	525	255	977	200	410	400	842	270	240
X-500/5	500	5	677	605	255	977	195	440	400	842	290	270
X-500/6	500	6	907	655	255	1207	170	490	450	1075	340	330
X-500/7	500	7	907	760	255	1207	170	520	450	1075	370	360
X-500/8	500	8	907	1565	255	1207	170	520	450	1075	370	360
Y-1000/2	1000	2	677	535	255	977	195	350	450	842	210	180
Y-1000/3	1000	3	677	535	255	977	195	390	450	842	250	220
Y-1000/4	1000	4	907	735	255	1207	170	440	450	1075	300	270
Y-1000/5	1000	5	907	705	255	1207	170	490	450	1075	340	330
Y-1000/6	1000	6	907	955	255	1207	170	520	450	1075	370	360
Y-1000/7	1000	7	907	1765	255	1207	170	520	450	1075	370	360
Y-1000/8	1000	8	907	1765	255	1207	170	620	450	1075	470	450
YA-2000/3	2000	3	907	735	265	1207	170	440	450	1075	300	270
YA-2000/4	2000	4	907	835	265	1207	170	490	450	1075	350	33
YA-2000/5	2000	5	907	935	265	1207	170	560	450	1075	420	400